

INSPECTION SYSTEM FOR CYLINDRICAL RODS

Combining crack detection, structure testing and gauging in one process is demanding. STATOGRAPH and MAGNATEST enable integrated inline inspection.




THE CHALLENGE

Cylindrical metal rods such as strut bars or bearing components must be inspected for surface defects while also meeting strict requirements regarding heat treatment, microstructure and dimensional accuracy. Integrating crack detection, magneto-inductive testing and gauging into one stable process is demanding, especially when different diameters and part variants are involved.

THE SOLUTION

The system combines STATOGRAPH CM/CM+ for surface inspection with MAGNATEST D or TCL for magneto-inductive testing. Automatic probe adjustment compensates for diameter changes via a recipe-based interface. Optional conveyor sections allow dimensional gauging and integrated sorting, creating a compact and cost-efficient alternative to more complex rotary systems.

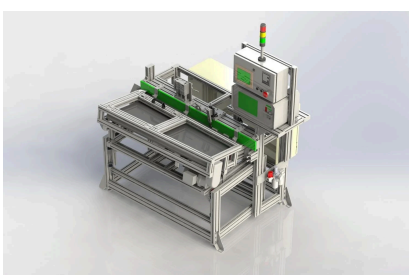

THE RESULT

Surface defects down to approximately 100 µm depth and width can be detected, with typical minimum flaw lengths around 5 mm, depending on material and finish. Parts can be scanned at speeds up to 125 mm/sec. The integrated concept enables efficient multi-parameter inspection within one streamlined production solution.

THE PRODUCTS

STATOGRAPH CM+ / CM

Crack testing of complex workpieces with eddy current



MAGNATEST D

Magneto-inductive testing of metallic components for material properties



MAGNATEST TCL

Magneto-inductive testing of components critical for safety



foerstergroup.com



The FOERSTER Group is represented by subsidiaries and representatives in over 60 countries worldwide. You can find a complete overview on our website.

Headquarters

Institut Dr. Foerster GmbH & Co. KG

In Laisen 70
72766 Reutlingen
Germany

+49 7121 140 0
info@foerstergroup.com